Jameco Part number 152320

Low Profile Din-Compatible

CHERRY

Series MX



- *Linear or tactile feel*
- *PCB or face plate mounting*
- *LED mounting*



PCB Mount



Face Plate Mount

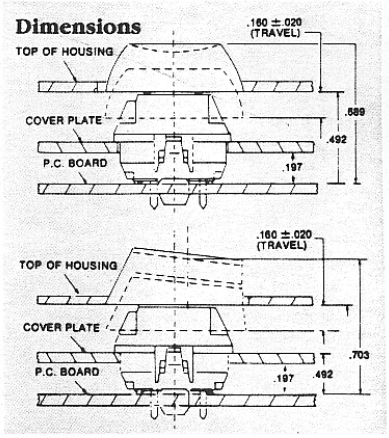

Part Number	Description	
MX1A-11DN	Standard force, momentary face plate mount with diode	
MX1A-11NN	Standard force, linear, face plate mount	
MX1A-11NW	Standard force, linear, PCB mount	
MX1A-21NW	Higher force, linear, PCB mount	
MX1A-31NN	Alternate action, face plate mount	
MX1A-31NW	Alternate action, PCB mount	
MX1A-A1NN	Standard force, tactile, face plate mount	
MX1A-A1NW	Standard force, tactile, PCB mount	
MX1A-B1NN	Higher force, tactile, face plate mount	
MX1A-B1NW	Higher force, tactile, PCB mount	
MX1A-C1NN	Standard force, silent tactile, face plate mount	
MX1A-C1NW	Standard force, silent tactile, PCB mount	
MX1A-E1NN	Standard force, click tactile, face plate mount	
MX1A-E1NW	Standard force, click tactile, PCB mount	
Electrical Spec's.	Contact Rating—	10 ma max
	Voltage—	12V max AC/DC
	Current—	10 ma max
	Initial contact resist—	200 m Ω (typical 25 mΩ)
	Life—	5 v/1ma; (50 million operations)
Mechanical Specs.	Pretravel—	.079″±.024″ (2.0 ± .6mm)
	Total travel—	.157″ - .016″ (4.0 ± .4mm)
	Operating Force—	2.5 oz typical (70 grams)
	Feel—	Linear or tactile—positive stop
	Mounting—	Cover plate or printed circuit board